



1 Form A/1 Form C 10A Small power relays

LQ RELAYS (ALQ)



RoHS compliant

Protective construction: Sealed type

FEATURES

- Miniature size and small:** 10(W) × 20(L) × 16(H) mm .394(W) × .787(L) × .630(H) inch
- Compact with high capacity:** 1 Form A and 1 Form C, 10 A
- Class F coil is available**
- Contact rating at 105°C 221°F is approved by UL/C-UL**
Please refer to "SAFETY STANDARDS" about the detail of contact rating.
- Surge 8,000 V, High breakdown voltage 4,000 V (Between contact and coil)**

TYPICAL APPLICATIONS

- Home appliances**
 - Refrigerators
 - Cooking ovens
 - Washing machine
 - Air conditioners

ORDERING INFORMATION

ALQ

Contact arrangement

1: 1 Form C

3: 1 Form A

Coil insulation class

Nil: Class B insulation

F: Class F insulation

Nominal coil voltage (DC)

05: 5V, 06: 6V, 09: 9V, 12: 12V, 18: 18V, 24: 24V

TYPES

Nominal coil voltage	Part No.	
	1 Form A	1 Form C
5V DC	ALQ305	ALQ105
6V DC	ALQ306	ALQ106
9V DC	ALQ309	ALQ109
12V DC	ALQ312	ALQ112
18V DC	ALQ318	ALQ118
24V DC	ALQ324	ALQ124

Standard packing: Carton 100 pcs., Case 500 pcs.

RATING

1. Coil data

Contact arrangement	Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power (at 20°C 68°F)	Max. applied voltage
1 Form A	5V DC	75%V or less of nominal voltage (Initial)	5%V or more of nominal voltage (Initial)	40.0mA	125 Ω	200mW	180% of nominal voltage (at 20°C 68°F) 130% of nominal voltage (at 85°C 185°F)*4
	6V DC			33.3mA	180 Ω		
	9V DC			22.2mA	405 Ω		
	12V DC			16.7mA	720 Ω		
	18V DC			11.1mA	1,620 Ω		
	24V DC			8.3mA	2,880 Ω		
1 Form C	5V DC	75%V or less of nominal voltage (Initial)	5%V or more of nominal voltage (Initial)	80.0mA	62.5Ω	400mW	150% of nominal voltage (at 20°C 68°F) 110% of nominal voltage (at 85°C 185°F)*4
	6V DC			66.7mA	90 Ω		
	9V DC			44.4mA	202.5Ω		
	12V DC			33.3mA	360 Ω		
	18V DC			22.2mA	810 Ω		
	24V DC			16.7mA	1,440 Ω		

2. Specifications

Characteristics	Item	Specifications		
Contact	Arrangement	1 Form A	1 Form C	
	Contact resistance (Initial)	Max. 100mΩ (By voltage drop 6 V DC 1 A)		
	Contact material	AgNi type		
Rating	Nominal switching capacity (resistive load)	5 A 30 V DC, 10 A 125 V AC, 5 A 250 V AC	N.O. side: 10 A 125 V AC, 5 A 250 V AC, 5 A 30 V DC N.C. side: 3 A 125 V AC, 2 A 250 V AC, 1 A 30 V DC	
	Max. switching power (resistive load)	150 W, 1,250 VA	N.O. side: 150 W, 1,250 VA N.C. side: 30 W, 500 VA	
	Max. switching voltage	250 V AC		
	Max. switching current	N.O.: 10 A (125V AC), N.C.: 3 A (125V AC)		
	Nominal operating power	200 mW	400 mW	
	Min. switching capacity (reference value)*1	100 mA, 5 V DC		
Electrical characteristics	Insulation resistance (Initial)	Min. 1,000 MΩ (at 500 V DC) Measurement at same location as "Breakdown voltage" section.		
	Breakdown voltage (Initial)	Between open contacts	1,000 Vrms for 1 min. (Detection current: 10 mA)	750 Vrms for 1 min. (Detection current: 10 mA)
		Between contact and coil	4,000 Vrms for 1 min. (Detection current: 10 mA)	
	Temperature rise (coil)*4	Max. 45°C 113°F (By resistive method, nominal coil voltage applied to the coil; contact carrying current: 10A, at 85°C 185°F)		
	Surge breakdown voltage*2 (Between contact and coil)	8,000 V (Initial)		
	Operate time (at nominal voltage) (at 20°C 68°F)	Max. 20 ms (excluding contact bounce time.) (Initial)		
Release time (at nominal voltage) (at 20°C 68°F)	Max. 20 ms (excluding contact bounce time, with diode) (Initial)			
Mechanical characteristics	Shock resistance	Functional	1 Form A: 294 m/s ² , 1 Form C: 196 m/s ² (Half-wave pulse of sine wave: 11 ms; detection time: 10μs.)	
		Destructive	980 m/s ² (Half-wave pulse of sine wave: 6 ms.)	
	Vibration resistance	Functional	10 to 55 Hz at double amplitude of 1.6 mm (Detection time: 10μs.)	
		Destructive	10 to 55 Hz at double amplitude of 2.0 mm	
Expected life	Mechanical	Min. 10 ⁷ (at 180 times/min.)		
Conditions	Conditions for operation, transport and storage*3	Ambient temperature: -40°C to +85°C -40°F to +185°F Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature)		
	Max. operating speed	20 times/min. (at nominal switching capacity)		
Unit weight		Approx. 7 g .25 oz		

* Specifications will vary with foreign standards certification ratings.

Notes: *1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

*2. Wave is standard shock voltage of ±1.2×50μs according to JEC-212-1981

*3. The upper limit of the ambient temperature is the maximum temperature that can satisfy the coil temperature rise value. Refer to Usage, transport and storage conditions in NOTES.

*4. When using relays in a high ambient temperature, consider the pick-up voltage rise due to the high temperature (a rise of approx. 0.4% V for each 1°C 33.8°F with 20°C 68°F as a reference) and use a coil impressed voltage that is within the maximum applied voltage range.


3. Expected electrical life

Condition: Resistive load, at 20°C 68°F, at 20 times/min., with diode


Type		Switching capacity	No. of operations
1 Form A (at 20 times/min.)		10 A 125 V AC	5×10 ⁴
		5 A 250 V AC	5×10 ⁴
		5 A 30 V DC	10 ⁵
1 Form C (at 20 times/min.)	N.O.	10 A 125 V AC	5×10 ⁴
		5 A 250 V AC	5×10 ⁴
	N.C.	5 A 30 V DC	10 ⁵
		3 A 125 V AC	2×10 ⁵
	2 A 250 V AC	2×10 ⁵	
	1 A 30 V DC	10 ⁵	

REFERENCE DATA

1.-(1) Max. switching capacity (1 Form A type)

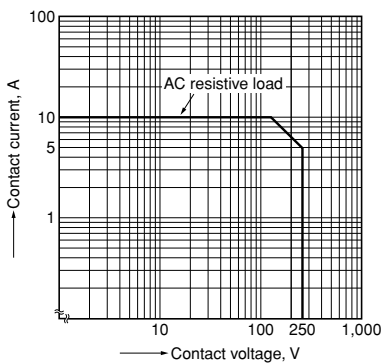


1.-(2) Max. switching capacity (1 Form C type)

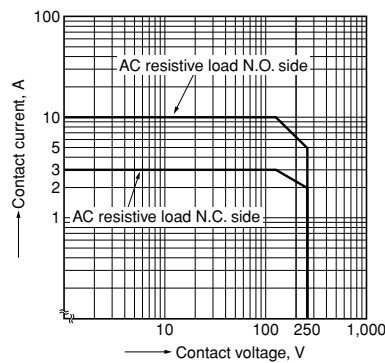


2. Life curve (N.O. side)

Ambient temperature: room temperature

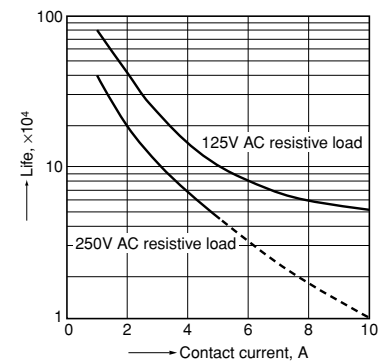


3.-(1) Coil temperature rise (1 Form A type)

Measured portion: Inside the coil
Contact carrying current: 5 A, 10 A

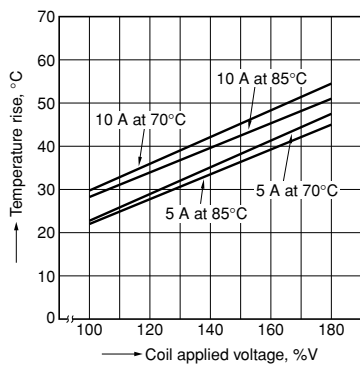


3.-(2) Coil temperature rise (1 Form C type)

Measured portion: Inside the coil
Contact carrying current: 5 A, 10 A

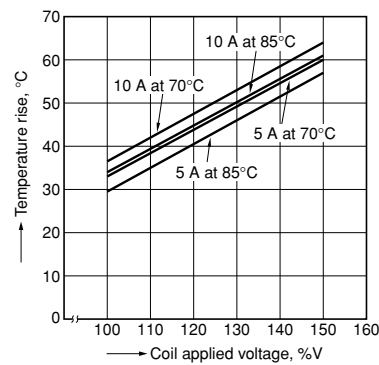


4.-(1) Ambient temperature characteristics (1 Form A type)

Contact carrying current: 5 A, 10 A

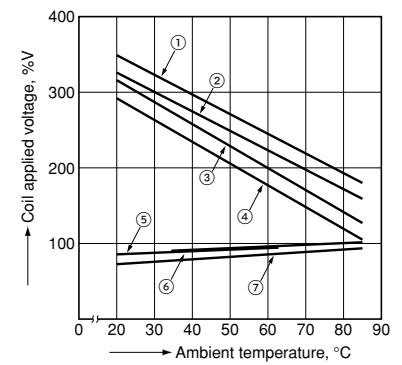

4.-(2) Ambient temperature characteristics (1 Form C type)

Contact carrying current: 5 A, 10 A




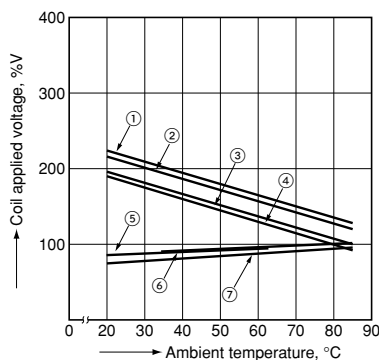


- ① Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 130°C 266°F) (Carrying current: 5 A)
- ② Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 130°C 266°F) (Carrying current: 10 A)
- ③ Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 115°C 239°F) (Carrying current: 5 A)
- ④ Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 115°C 239°F) (Carrying current: 10 A)
- ⑤ Pick-up voltage with a hot-start condition of 100%V on the coil (Carrying current: 10 A)
- ⑥ Pick-up voltage with a hot-start condition of 100%V on the coil (Carrying current: 5 A)
- ⑦ Pick-up voltage

DIMENSIONS (mm inch)

The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://industrial.panasonic.com/ac/e/>

CAD Data

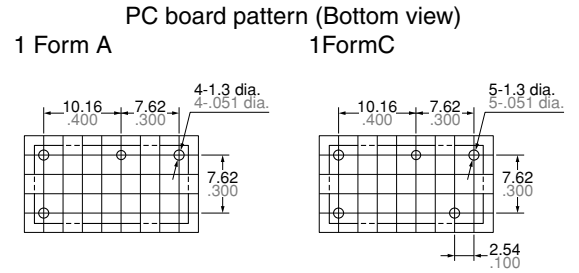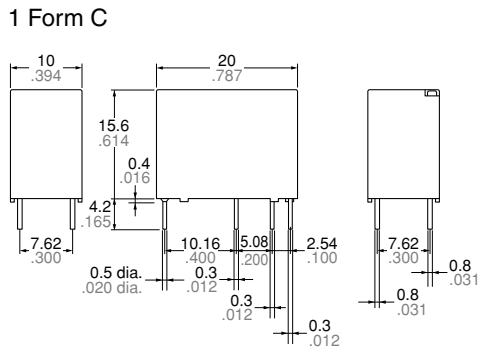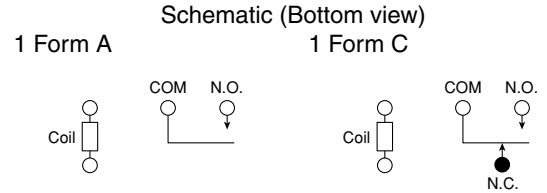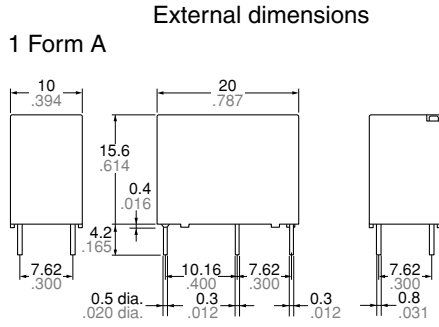

Tolerance: $\pm 0.1 \pm 0.004$

Dimension:
 Less than 1mm .039inch: $\pm 0.2 \pm 0.008$
 Min. 1mm .039inch less than 5mm .197 inch: $\pm 0.3 \pm 0.012$
 Min. 5mm .197 inch: $\pm 0.4 \pm 0.016$

General tolerance
 $\pm 0.2 \pm 0.008$
 $\pm 0.3 \pm 0.012$
 $\pm 0.4 \pm 0.016$

SAFETY STANDARDS

Type	UL/C-UL (Recognized)					VDE (Certified)				
	File No.	Contact	Load	Temp.	Cycles	File No.	Contact	Load	Temp.	Cycles
1 Form C (ALQ1**)	E43028	N.O.	10A 125V AC, General Use	40°C 104°F	5 × 10 ⁴	40032836	N.O.	10A 250V AC (cosφ=1.0)	85°C 185°F	10 ⁴
			5A 277V AC, General Use	40°C 104°F	10 ⁵			10A 250V AC (cosφ=0.4)	85°C 185°F	10 ⁴
			5A 240V AC, Resistive	80°C 176°F	10 ⁵			5A 250V AC (cosφ=1.0)	85°C 185°F	5 × 10 ⁴
			5A 30V DC, General Use	40°C 104°F	10 ⁵			5A 30V DC (0ms)	85°C 185°F	10 ⁴
			4FLA/4LRA 277V AC, AC Motor	105°C 221°F	10 ⁵					
			3FLA/18LRA 240V AC, AC Motor	85°C 185°F	10 ⁵					
			1/6HP 125V AC, AC Motor Starting	40°C 104°F	10 ³					
			1/6HP 277V AC, AC Motor Starting	40°C 104°F	10 ³					
		N.C.	3A 240V AC, Resistive	80°C 176°F	10 ⁵		3A 250V AC (cosφ=0.4)	85°C 185°F	10 ⁴	
			3A 125V AC, General Use	40°C 104°F	10 ⁵					
			2A 277V AC, General Use	40°C 104°F	10 ⁵					
			2A 30V DC, Resistive	40°C 104°F	10 ⁵					
1 Form A (ALQ3**)	E43028	N.O.	10A 125V AC, General Use	40°C 104°F	5 × 10 ⁴	40032836	N.O.	10A 250V AC (cosφ=1.0)	85°C 185°F	10 ⁴
			10A 125V AC, Carry Only	85°C 185°F	5 × 10 ⁴			10A 250V AC (cosφ=0.4)	85°C 185°F	10 ⁴
			5A 277V AC, General Use	40°C 104°F	10 ⁵			5A 250V AC (cosφ=1.0)	85°C 185°F	5 × 10 ⁴
			5A 240V AC, General Use	105°C 221°F	6 × 10 ³			5A 30V DC (0ms)	85°C 185°F	10 ⁴
			5A 30V DC, General Use	40°C 104°F	10 ⁵					
			4FLA/4LRA 277V AC, AC Motor Starting	105°C 221°F	10 ⁵					
			1/6HP 277V AC, AC Motor Starting	40°C 104°F	10 ³					
			1/6HP 125V AC, AC Motor Starting	40°C 104°F	10 ³					
			4A 125V AC, Resistive Load	105°C 221°F	10 ⁵					
			2A 120V AC, Tungsten Load	105°C 221°F	6 × 10 ³					
			1A 125V AC, Pilot Duty	105°C 221°F	10 ⁵					

Note) CSA standard: Certified by C-UL

NOTES

1. For cautions for use, please read "GENERAL APPLICATION GUIDELINES" on page B-1.